[illegible]

.[illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] :1 [illegible] 4 .1

.[illegible] [illegible] [illegible] [illegible] .2

[illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] .3
.[illegible] [illegible] [illegible] [illegible] [illegible]

.[illegible] [illegible] [illegible] [illegible] [illegible] [illegible] .4

.[illegible] [illegible] [illegible] .5

.[illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] .6

[illegible] [illegible] [illegible] [illegible] [illegible] .7.

Ear and Forehead Thermometer

CE RoHS ISO13485

:□□□□□

32.0 :□□□□□□ □□□□ ° C-42.9 ° C (89.6 ° F-109.2 ° F)

0.2 ± :□□□ □□□□□□□ □□□□□□ ° C / 0.4 ° F 35.5 ° C-42.0 ° C (95.9 ° F-107.6 ° F)

± 0.3 ° C / 0.5 ° F 32.0 ° C-35.4 ° C (89.6 ° F-95.7 ° F)

± 0.3 ° C / 0.5 ° F 42.1 ° C-42.9 ° C (107.8 ° F-109.2 ° F)

□□□□□□□□ □□□□ 0.1 / □□□□□ □□□□ 0.1 :□□□□□□

□□□□ 50.0) □□□□□ □□□□ 40.0 □ □□□□□ □□□□ 10.0 :□□□□□□□ □□□□ F-104.0 □ 80≥ □□□□□□□ (□□□□□□□□ □□□□ □□□□□ □□□

25.0- :□□□□□□□ □□□□ ° C-55.0 ° C (-13.0 ° F-131.0 ° F) □□□□□ □□□ □90 ° □□□□□□□

□□□□□□□□: D.C.3V 1 × CR2032 □□□□□□ □□□□□□

114 :□□□□□mm × 34mm × 26mm

□□□□□□ □□□□□: approx.50g (□□□□□□□□ □□□ □□ □□□)

□□□□□□□ □□□□□□□ .:

□□□□□□ / ctn: 100pcs
□□ 33.5 * 34.5 * 50 :□□□□□□□ □□□□□□□□ □□□□□□ □□□
G.W./Ctn: 12.00 □□□
□□□□□□□:
1.Casing □ □□□□□ □□□ □□ □□□□□□□ □□□□□□□ □□□□□□ :□□□□□□□ □□□□□□□
2.CE0120 □□□□□□□ □□□□□□□ □.
3. supply □□□□□ □□ □□□ 200 :□□□□□.

Error less than or equal to ±0.2℃

1s accurate measure

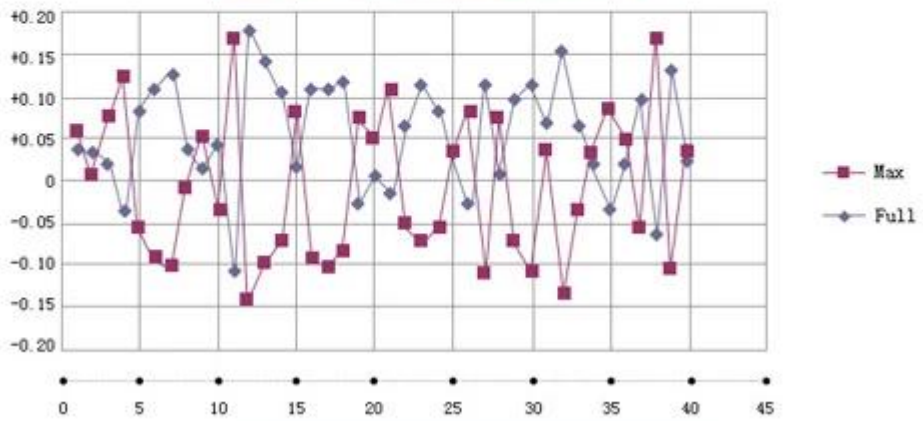

□□□□: sanieleung@dor-medex.com

□□□□□□□□ □□□□:thermometersupplier.com