

□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□:

1. □□□□□ □□□ □□□ □□ □□□□□□□□□□ □□□□□ □□ □□□□□□□□ □□□□ □□□
2. □□□ □□ & □□□□□□ □□□□ □□□□□ □□□□ □□□□□□□□□□ □□□□ □□□
3. □□□□□□ □□ □□□ □□□□□□□ □□□□□□□ □□□□□□□ □□□□□ □□ □□□ □□ □□□ □□ □□□□□□□□□□
4. □□□□ □□□ □□ □□□□□□□□ □□□ □□□□□□ □□, □□□□ □□□□□ □□ □□□ □□ □□□□□
5. □□□□□ □□ □□□□ □□□□□□ □□ □□□ □□□□□ (□□□□□□□ □□□ □□□□□□□□□□ □□□□□ □□□□□ □□□□ □□ □□□□ □□)
6. □□□□□ □□□□□ □□ □□□□□□□□ □□□□□□□
7. Large □□□□□□ □□□□□□ □□ □□□□□
8. □□ / □□ □□□□□ □□□□□□ □□□□
9. □□□□□□□□ □□□□ □□□□□

<b>Technical parameters</b>		
Measurement method	Non-contact	
Effective distance	5cm~8cm	
Range	Human body	35.5°C~42.9°C (95.9°F~109.2°F)
	Object	0°C~118°C (32°F~244°F)
Accuracy	Human body	±0.2°C/0.4°F
	Object	±1.0°C/1.8°F
Resolution	0.1°C/°F	
Working condition	10°C~40°C(50°F~104°F) RH≤80%Non-condensing	
Storage condition	-25°C~55°C (-13°F~131°F) RH≤90%Non-condensing	
Power supply	d.c. 3V 2 AA alkaline Battery	
Power consumption	When off≤10uW	
	When measurement≤30mW	
Power level indicator	Indication for low power level	
Memory	Automatic recall of last reading	
Display	LCD back-lit display	
Reading scale	Celsius or Fahrenheit	
Automatic shut off	In 30 seconds	
Dimensions	93mm×153mm×41mm	
Net weight	125g	
Standards	EN60601-1,EN 12470-5 , ASTM 1965-98	

<b>Packing information:</b>	
Packing method:	Each in a color box with plastic tray
Qty/ Ctn:	48pcs
G.W:	13 kg
N.W:	12 kg
Carton Dimension:	56*39*33 CM

<b>Certificates:</b>	ISO13485,CE0499,RoHS
----------------------	----------------------





## Non Contact Infrared Forehead Thermometer




**CE**   **RoHS**   **ISO13485**



Error less than or equal to  $\pm 0.2^{\circ}\text{C}$

Is accurate measure

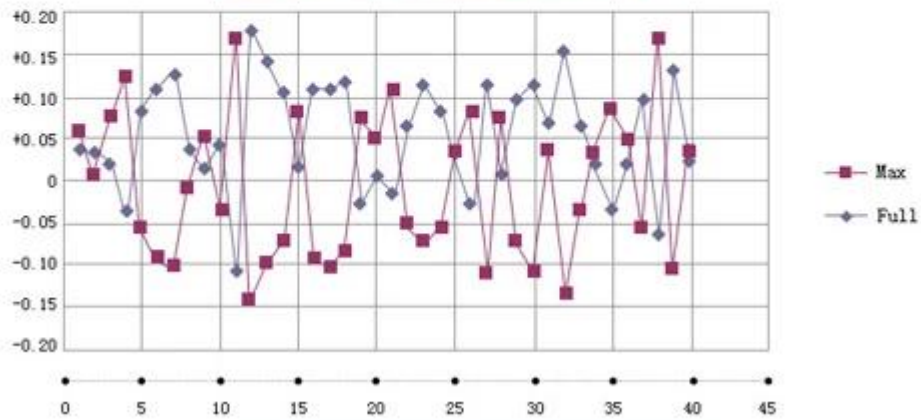

☐☐☐☐☐ ☐☐☐☐: [sanieleung@dor-medex.com](mailto:sanieleung@dor-medex.com)

☐☐☐☐☐☐☐: [thermometersupplier.com](http://thermometersupplier.com)