

Medexpro 37.8 °C (100 °F)

- 1
- 1
- 1
- 1
- 5



illustration



specifications

- Model: jt002nm
- Battery: 1.5 dc 1LR41
- Power: 0.1 mw
- Accuracy: ±1100 (1 ±10)
- Temperature range: 37.8 °C

Accuracy: ±0.1 °C (±0.18 °F)
Resolution: 0.1 °C (0.18 °F)
Operating Range: 32 °C to 43 °C (89.6 °F to 109.4 °F)

Accuracy: ±0.1 °C (±0.18 °F)
Resolution: 0.1 °C (0.18 °F)
Operating Range: 32 °C to 43 °C (89.6 °F to 109.4 °F)
Storage Range: +10 °C to +40 °C (50 °F to 104 °F)
Temperature Range: -20 °C to +60 °C (-4 °F to 140 °F)
Humidity: 30% to 95% rh
Weight: 15g (0.53oz)
Dimensions: 20mm (W) * 130mm (L) * 13mm (D)
Material: ABS (IP40)
Packaging: 80/ctn
Size: 331mm * 305mm * 260mm

Instructions:

1. LCD backlight on/off / LCD backlight on/off

Press the power button to turn the LCD backlight on/off.

* Lo: 32°C/90°F, Hi: 42.9°C/109.9°F




Accuracy: ±0.1 °C (±0.18 °F)

a) Accuracy: ±0.1 °C (±0.18 °F) (35.7 °C/96.3 °F to 37.3 °C/99.1 °F)

b) Accuracy: ±0.1 °C (±0.18 °F) (36.2 °C/97.2 °F to 37.7 °C/99.9 °F)

c) Accuracy: ±0.1 °C (±0.18 °F) (35.2 °C/95.4 °F to 36.7 °C/98.1 °F)

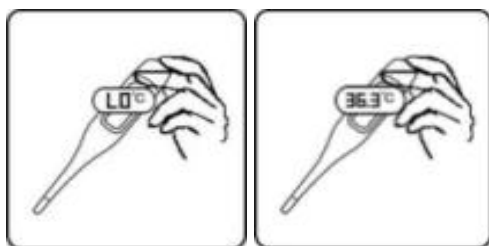

step3.

Accuracy: ±0.1 °C (±0.18 °F) (35.2 °C/95.4 °F to 36.7 °C/98.1 °F)

