[illegible]:
[illegible]
[illegible]
[illegible]
[illegible]

[illegible] (BBT) [illegible]2[illegible]1[illegible]2[illegible]2[illegible]
BBT [illegible] BBT [illegible]
[illegible] BBT [illegible]

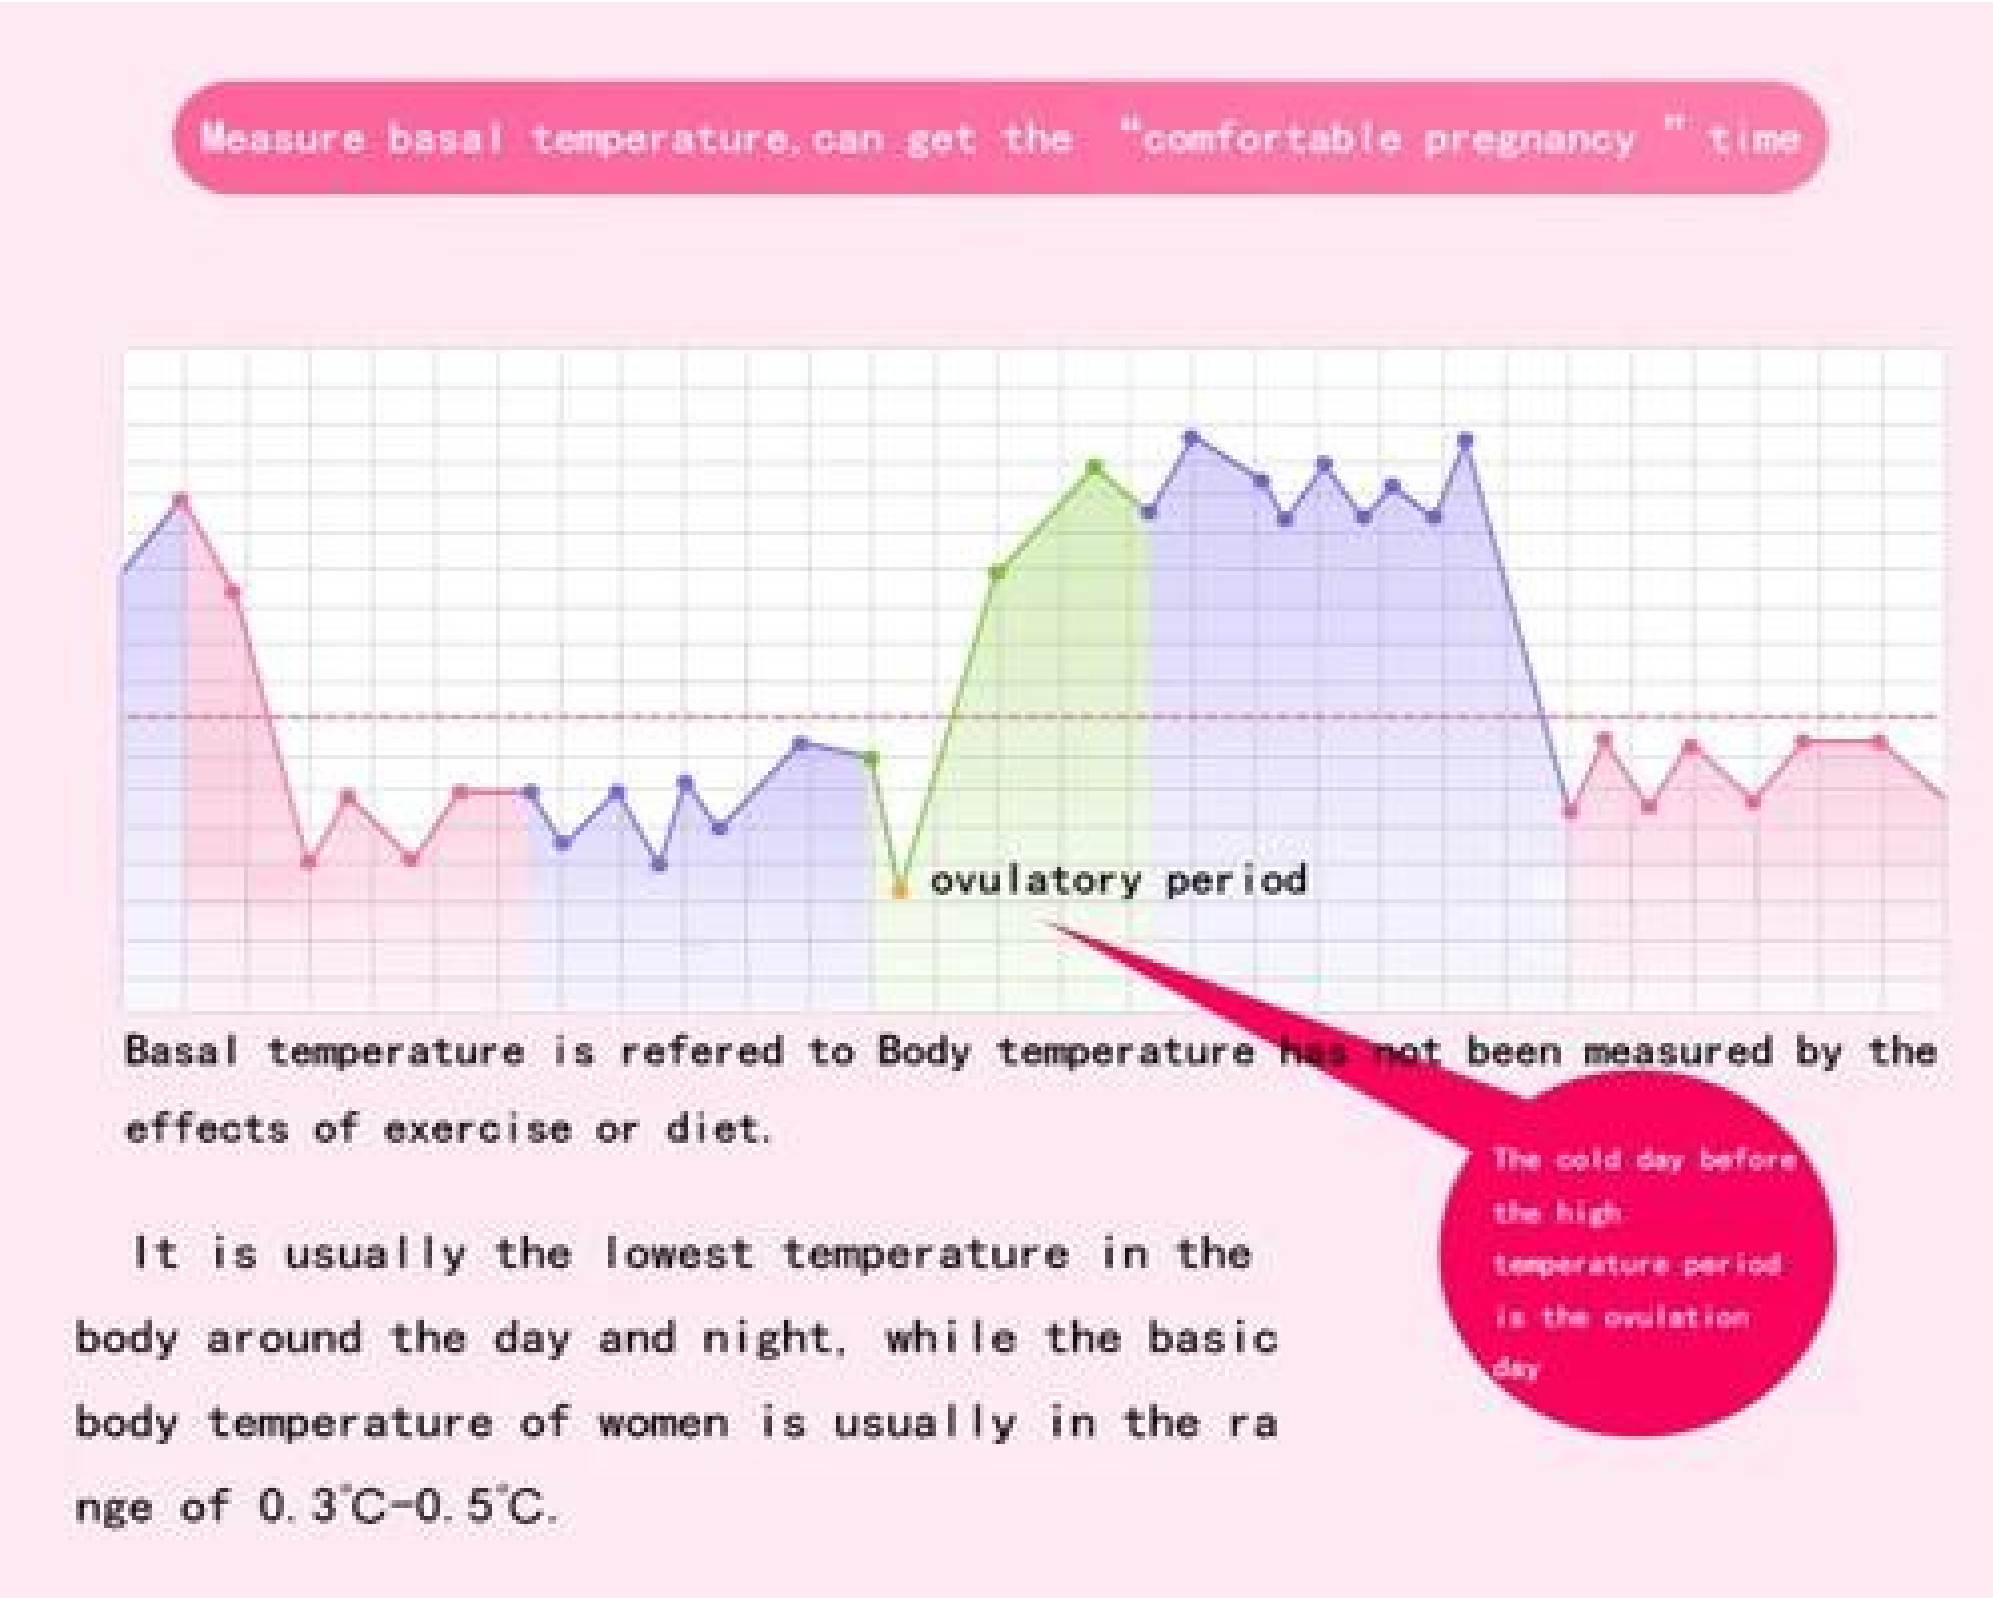

1.
LCD □□□□□□□□□□□□□□/□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
* □: □□□□□32℃□□□90℉□□□□□lcd □ Lo □□□□□□□□□□□□□□□□□□42.9 ℃□□□109.9 ℉□□□□□□□lcd □ Hi □□□□□□□

□□□□□.□□□□□□□□□□□□□ (□)

) □□□□: "√" □□□/□□□□□□□□□□□□□□□□□□□□□□□□35.7 ℃ □37.3 ℃ (96.3 ℉□99.1 ℉) □□□□□□□□

step3.

□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□10□□□□□□□ □□□□□□□□ LCD □□□□□□□□□□□□□□ (□□□□) □□□□□□□□ □□

step4.

□□□□□□□□□□□□□□□□□/□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□ around10 □□□□□□□□□□ □□□□
□□□□□□□□□□□□□□□□□□□□□□□□

Product information

name	thermometer	range	32—43°C
model	JT002BTS	humidity	-20°C+60°C≤85%RH
detector	thermistor	weight	15g(included battery)
temperature	Four digit display	size	20mm*130mm*13mm
accuracy	±0.05°C(36-39°C) ±0.2°C (32-35.99°C, 39.01-43°C) ±0.1°F (96.8-102.20°F) ±0.4°F(89.6-96.78°F, 102.2-107.6°F)		

Measure in a room temperature test tank at room temperature of 25 °C (77°F)

2
High sensitive thermistor temperature measurement
The advanced temperature sensing technology, aimed at the oral temperature measurement, can be measured in a minute to measure the body temperature
38
39
37
36.6 °C
40
36
41
35
42